

# Gary®

A member of the Fire King Security Group

1-800-457-2424

info@fkisecuritygroup.com

## Gary® Executive Safe Model EX0915

### Important! Please read before installing:

- For security purposes, please change the codes and install the safe prior to use.
- Keep codes in a safe place. Do not use personal data like birthdays, telephone numbers, etc.
- Keep emergency key in a safe place, not inside the safe itself.
- Remove batteries if the safe will not be used for an extended period of time.
- Contact Fire King Security Group with any additional questions.

### OPERATING INSTRUCTIONS

#### Opening the Executive Safe with your key/installing the batteries:

- Pull out the keyhole cap.
- Insert the key and turn clockwise.
- The lid should open automatically.
- With the lid open, turn the key counter-clockwise and remove it.
- Remove the black plastic box, and open the battery box cap.
- The Executive Safe requires 4 AA/1.5 V alkaline batteries (included).

*NOTE: If the batteries are low and require replacement, the safe will beep three times as a reminder.*

#### Opening the Executive Safe with the keypad:

- Press “#” key to activate the keypad.
- Enter the factory-set code “168” or your personal code (see below) and press “#”.
- The lid should open automatically.

*NOTE: Use the \* to delete the wrong input. If the wrong code is entered three times, the keypad will automatically be locked for 5 minutes.*

#### Setting your personal code:

- Press “#” key to activate the keypad.
- Press “0” followed by “0” and followed by the “#” key.
- Enter the factory-set original code, “168”.
- Press the “#” key, followed by your new, **3 to 6 digit code**, and press the “#” key again.
- As a check, enter your new 3-6 digit code again, followed by the “#” key.
- If you have successfully changed your code, the safe will beep twice.

## Locking the Executive Safe:

To lock the safe, press down on the top until it clicks closed.

*NOTE: To open the safe with the emergency key, turn the key counter-clockwise and remove it. Press the top down to lock.*

## INSTALLATION INSTRUCTIONS

### Installing the Executive Safe:


#### 1. Remove the safe from the mounting plate:

Open the safe and press the “active pole” located in the front of the safe (see drawing for reference). Then, lift the front of the safe and move it forward to unlatch it from the mounting plate.

#### 2. Install the mounting plate in your desired location with 4 included screws.

#### 3. Re-install the safe onto the mounting plate:

Allow the two hooks on the mounting plate to insert into the slots on the back of the safe. Press the front of the safe down to latch onto the mounting plate. A click will inform you that you’ve successfully installed the safe to the base.

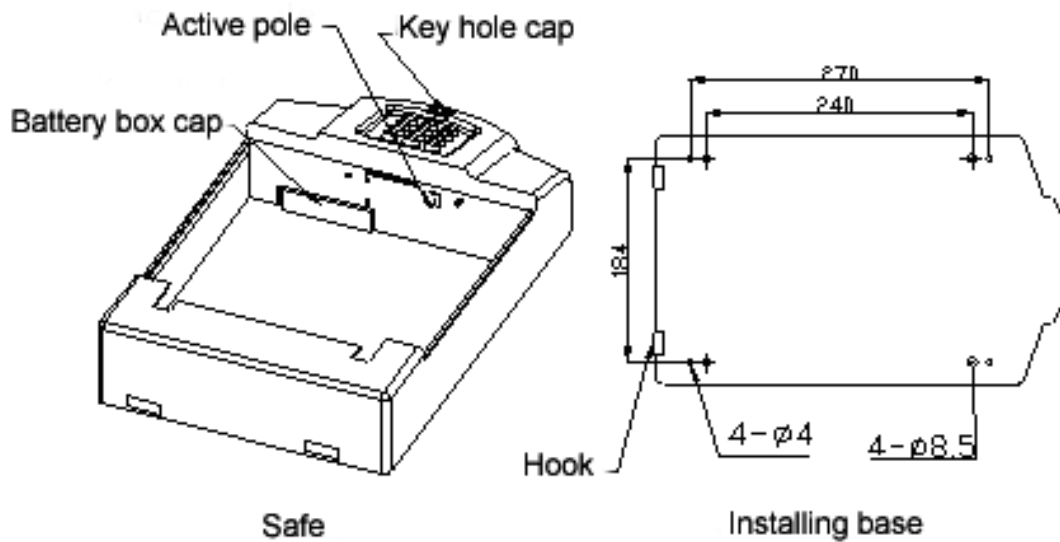

## Executive Safe Specifications

Outside Dimensions: 9" (W) x 15" (D) x 3.3" (H) (mm: 230W x 380D x 85H)

Nt./Gr. Weight (Kg): 6.5/7.5 (approx. 14.3/16.5 lbs.)

Power Supply: 4 AA/1.5 V batteries (Alkaline)

Working Temperature: 14° – 176° F

Working Humidity: 20% – 90% rH